


REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/2/01
A	ADD NOTES	6/15/07
B	1816 CHANGE C-2V TO C-2F	11/16/07
C	1816 VENDOR CHNG FILAMENT	7/5/11

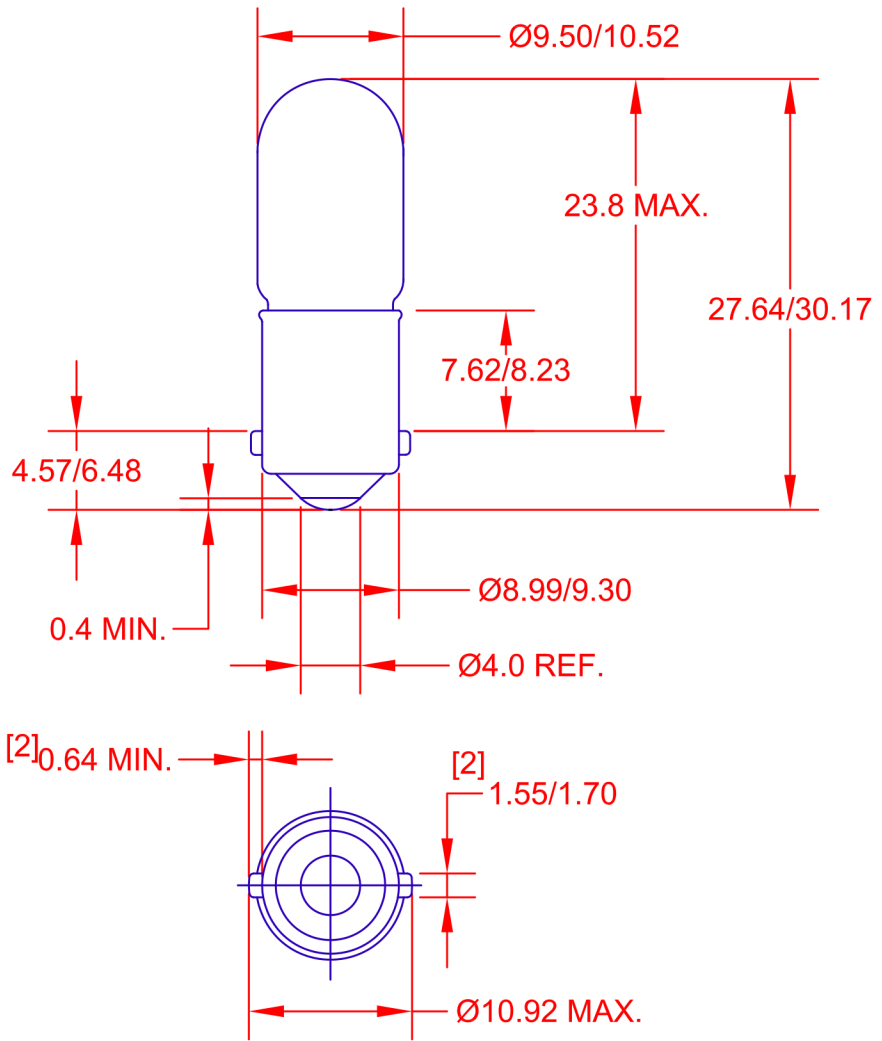

JKL LAMP NUMBER	VOLTS RATED	AMPS ±10%	MSCP ±25%	LUMENS ±25%	AVERAGE LIFE HRS.	FILAMENT TYPE
49	2.0	.060	.04	0.50	1,000	S-2

\*FLASHER TYPE LAMP

NOTES:

- FLASHER TYPE LAMPS HAVE A BI-METAL STRIP ADDED TO THE FILAMENT MOUNT TO PROVIDE THE FLASHING. HEAT FROM THE FILAMENT CAUSES THIS STRIP TO BEND AWAY FROM THE LEAD WIRE, BREAKING THE CIRCUIT. AS THE BI-METAL STRIP COOLS IT RETURNS TO ITS ORIGINAL POSITION AGAINST THE LEAD WIRE AND THE LAMP LIGHTS.
- FLASHER TYPE LAMPS ARE DESIGNED TO RANDOMLY BLINK AT THE APPROXIMATE RATE OF 50-150 FLASHERS PER MINUTE AT A NORMAL ROOM TEMPERATURE, SOME WILL BE OUTSIDE THIS RANGE. AS AMBIENT TEMPERATURE AND/OR INPUT VOLTAGE CHANGES, THE FLASH RATE MAY VARY CONSIDERABLY.

<p>THIRD ANGLE PROJECTION</p>	<p>METRIC</p> <p>DIMENSIONS ARE IN MILLIMETERS</p> <p>TOLERANCE UNLESS OTHERWISE SPECIFIED</p> <p>1 PL +/- 0.2</p> <p>2 PL +/- 0.20</p> <p>ANGLE +/- 0</p>	<p><b>JKL COMPONENTS CORPORATION</b></p>				
	<p>TITLE</p> <p>T-3 1/4 MINIATURE SINGLE CONTACT BAYONET</p>	<p>SIZE</p> <p><b>A</b></p>	<p>FSCM NO.</p> <p><b>55335</b></p>	<p>DRAWING NO.</p> <p><b>BAYONET SINGLE CONTACT T-3 1/4</b></p>	<p>SCALE</p> <p>NONE</p>	
<p>DRAWN BY</p> <p>L. WENGSTROM</p>	<p>APP'VD BY</p> <p>L.R.</p>	<p>DATE</p> <p>7/5/11</p>	<p>RELEASED DATE</p> <p>3/2/01</p>	<p>REVISION DATE</p> <p>7/5/11</p>	<p>REV. NO.</p> <p><b>C</b></p>	<p>SHEET</p> <p>1 OF 1</p>
<p>- CAD DRAWING -</p> <p>MANUAL REVISIONS NOT PERMITTED</p>						