

1750E

TUBE GUITAR AMPLIFIER - OUTPUT TRANSFORMER

- Designed for drop in replacement of original units.
- Constructed to look similar to original factory units (where possible).
- Material used & design specifications were kept as close as possible to the original part to preserve the stock "tone".
- Open style with minimum 9" long primary and secondary leads
- Frequency response 70Hz - 10KHz (0/-1.0dB reference @ 1KHz)
- Distortion is less than 1% @ 70Hz

ELECTRICAL SPECIFICATIONS

Characteristics		Typical	
Input Impedance		8500 Ohms	
Output Impedance		8 Ohms	
Output Power		15W	
DCR			
Primary Red-Brown		150.0 Ohms	
Primary Red-Blue		150.0 Ohms	
Secondary Black-Green		0.450 Ohm	
Inductance	Impedance	@ 1.0 kHz, 1.0 V OC	
Primary Blue-Brown	24.0H	145K Ohm	
Secondary Black-Green	822mH	520.8 Ohm	
Leakage Inductance		@ 1.0 kHz, 1.0 V SC	
Primary Blue-Brown		469.2mH	
Dielectric Strength		1500VRMS	
Temperature Range		-40 to 105 degC	

TEST CONDITIONS

Measurement instruments:



D scope series iii audio analyzer
Wayne Kerr 3255B with a 3265B

Keithley 2010 DVM

Hp4192a impedance analyzer

* All graphs input level 27dBu @1.0KHz reference.


**The results are typical and are subject to normal manufacturing and electrical tolerances.

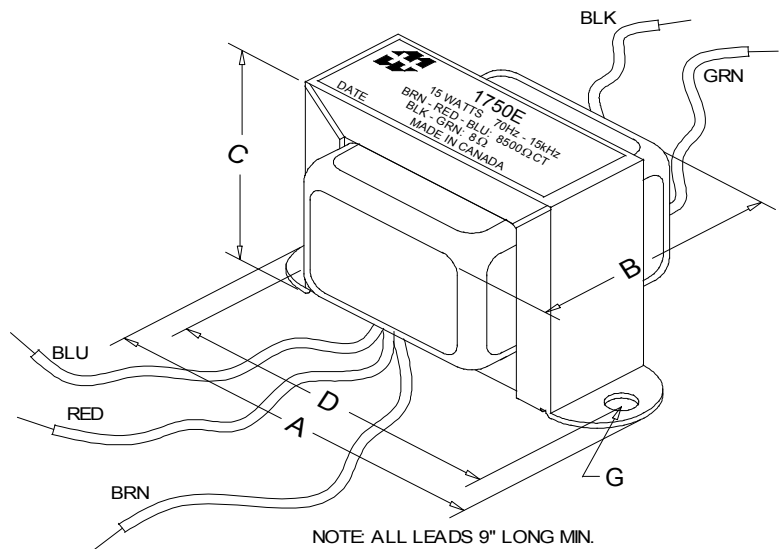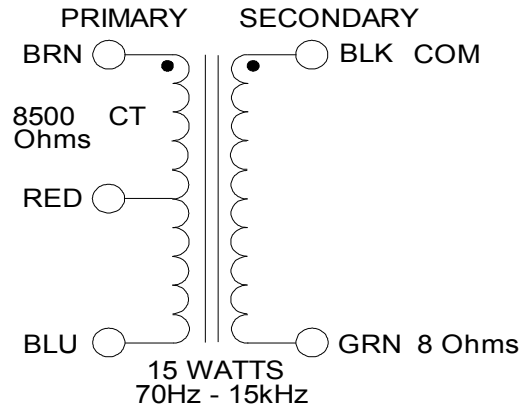


Dimensions

A	3.250" ±0.063	D	2.813" ±0.063
B	2.085" ±0.125	G	0.187" ±0.015
C	1.995" ±0.063		


TYPICAL TEST CIRCUIT

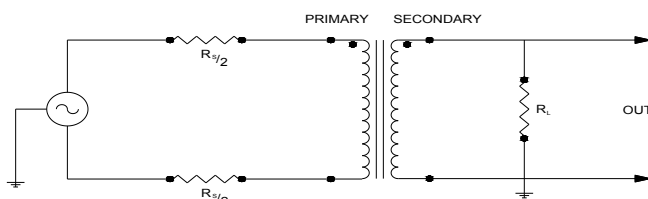


1750E Frequency Response RS = 8.5K Ohms

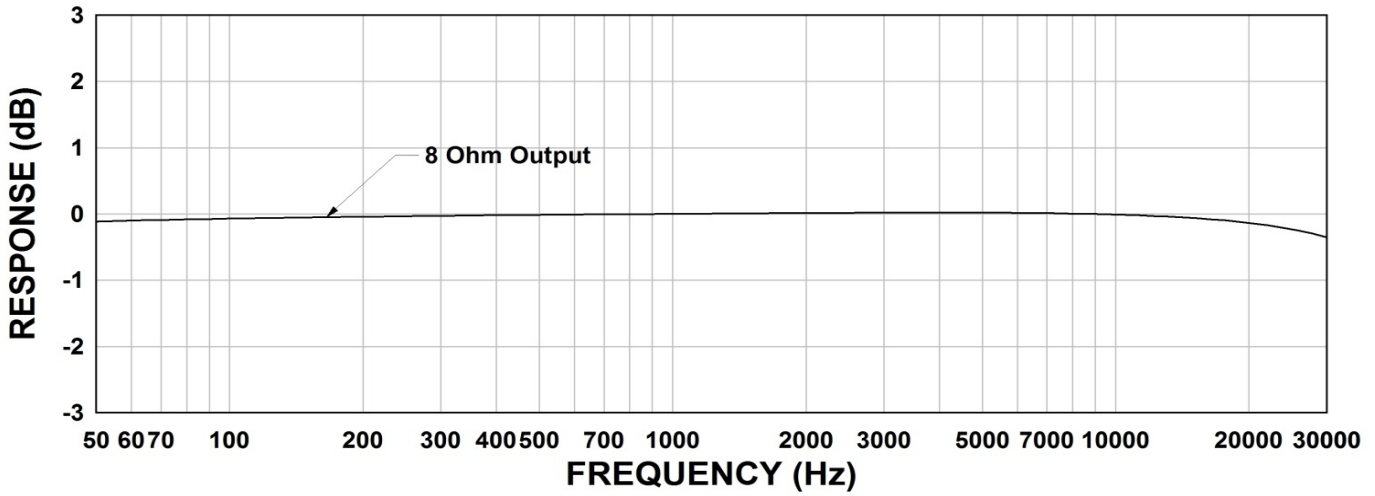

1750E Phase Shift RS = 8.5K Ohms

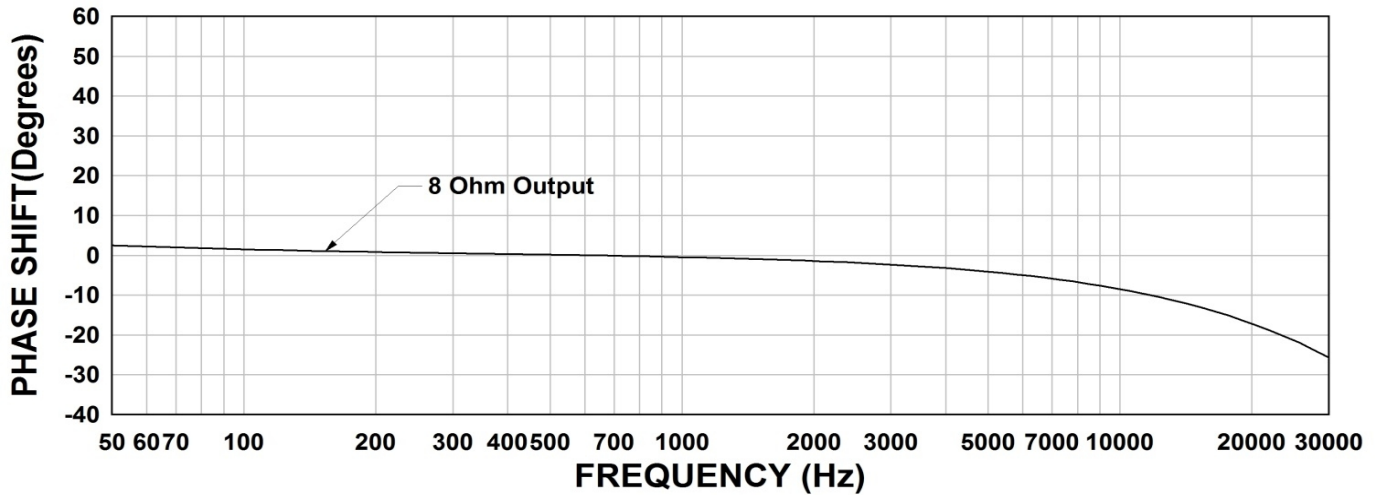

1750E THD+N RS = 8.5K Ohms

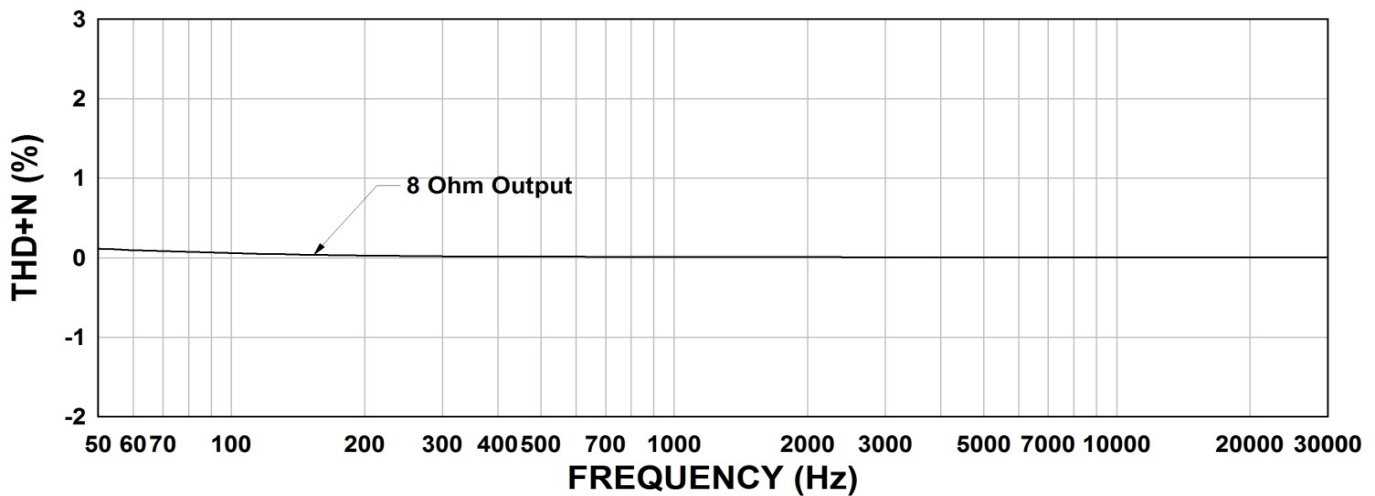

This drawing and the information in it is the property of Hammond Manufacturing. It may not be reproduced, transmitted or used in any manner whatsoever without the written permission of Hammond Manufacturing. Data subject to change without notice.