


ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 117V, 60Hz, PIN 24 - PIN 22	115mA Max.
Sec. N.L.V	@ 117V, 60Hz, PIN 24 - PIN 22	
	PIN 19 - PIN 17 =	117.0V ±2%
	PIN 15 - PIN 16 =	324.6V ±2%
	PIN 12 - PIN 13 =	27.00V ±2%
	PIN 9 - PIN 10 =	7.200V ±2%
DCR	@ 20°C, PIN 24 - PIN 22 =	6.299 Ω ±20%
	@ 20°C, PIN 19 - PIN 17 =	7.428 Ω ±20%
	@ 20°C, PIN 15 - PIN 16 =	36.37 Ω ±20%
	@ 20°C, PIN 12 - PIN 13 =	10.97 Ω ±20%
	@ 20°C, PIN 9 - PIN 10 =	0.075 Ω ±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC

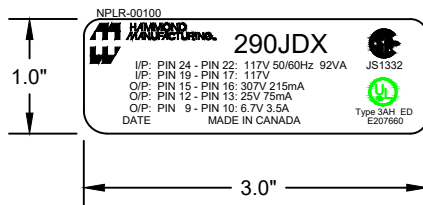

TOLERANCES ON ALL DIMENSIONS: ±0.063

PROPERTY AND COPYRIGHT NOTICE					
THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.					
REV	NOTES	BY	DATE	REV	NOTES
0	RELEASED.	C.I.	10/21/20		

HAMMOND MANUFACTURING		ELECTRONIC DIVISION 52 RANKIN PLACE WATERLOO, ONTARIO, N2J 3Z5 PHONE: 519.886.6181 FAX: 519.886.9540	
POWER TRANSFORMER			
DRAWN	DATE	NUMBER	
APPROVED	DATE	290JDX	