

- Material acc. to DIN 17660: Cu Zn 39 Pb 3
- Min. tensile strength: 430 N/mm²
- Surface finish acc. to DIN 267: nickel plated (G 3 E)
- Material number: 2.0401
- Tolerance for length dimensions: +/- 0.1 mm
- All articles are also available without undercut.


- Available from stock. Delivery times for intermediate lengths and special versions upon request.



Standard range – spacer bolts [Brass, nickel plated]



EXECUTION DIA [Internal / external thread]

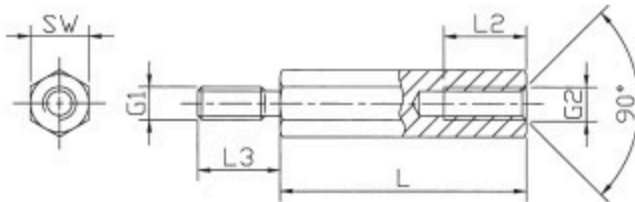

Internal thread lengths [mm]

L	L2 at M2.5 to M5	L2 at M2	L2 at M6
5	3	3	



External thread lengths [mm]

G1=G2	L3
M2,5	6



Order No. **Execution** **Material** **SW* (hexagon)** **Thread** **Standard lengths in mm**

212 x DIA Brass SW5 M2.5 5, 6, 8, 10, 12, 15, 18, 20, 25, 30, 35, 40, 45, 50, 55, 60

